


# Pneu-Trol<sup>®</sup>

## INLINE CHECK VALVES

- Soft Seat for Bubble-Tight Seal on Gas
- Metal-to-Metal Seat for Leak-Tight Seal on Liquids
- Compact Over-All Length
- NPTF Threads Standard

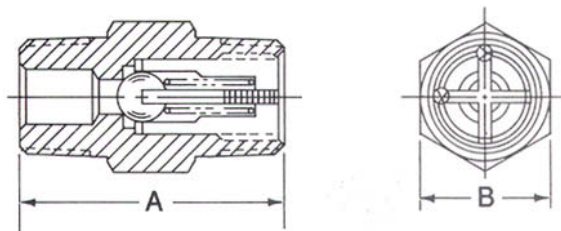

### DIMENSIONS

Size	A	B HEX	Cv	GPM (L/min)	Max. Oper. Press. PSI (Bar)	
					Brass	Steel & S.S.
1/8"	31/32 (24.5)	7/16 (11.2)	.17	1.0 (3.8)	2,000 (138)	—
1/4"	1-3/8 (35.0)	5/8 (15.9)	.56	2.5 (9.5)	2,000 (138)	3,000 (207)
3/8"	1-5/8 (41.3)	3/4 (19.1)	1.31	6.0 (22.8)	2,000 (138)	3,000 (207)
1/2"	2-1/16 (52.4)	7/8 (22.3)	2.71	10.0 (37.9)	2,000 (138)	3,000 (207)
3/4"	2-1/4 (57.2)	1-1/8 (28.6)	3.40	15.0 (56.8)	2,000 (138)	3,000 (207)

( ) Parentheses = Millimeters



### ORDERING INFORMATION

#### METAL-TO-METAL SEAT

Size	DESCRIPTION		
	Brass	Steel	St. Steel
1/8"	CMM10B1	—	—
1/4"	CMM20B	CMM20S	CMM20SS2
3/8"	CMM25B	CMM25S	—
1/2"	CMM30B	CMM30S	—

#### SOFT SEAT

Size	DESCRIPTION		
	Brass	Steel	St. Steel
1/8"	CMMO10B1	—	—
1/4"	CMMQ20B	CMMQ20S	CMMO20SS2
3/8"	CMMO25B	CMMO25S	CMMO25SS
1/2"	CMMQ30B	CMMQ30S	—
3/4"	CMMQ35B	—	—

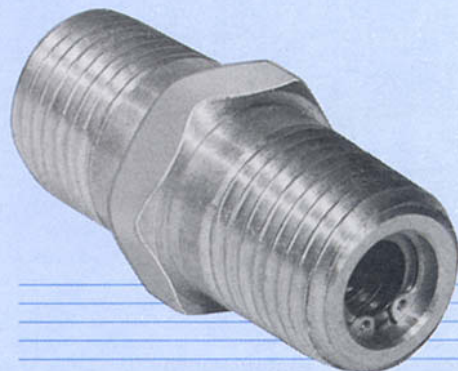

### SPECIFICATIONS

#### Standard Cracking Pressure

1 PSI to 2.5 PSI (.07 to .17 bar)  
Other cracking pressures available.  
Consult factory.

#### Operating Temperature

(Soft Seat Only) Buna N  
Maximum Operating Temperature  
-30°F to 190°F. (-35°C to 91°C).  
Other material available. consult factory.

#### Threads

NPTF