

SPECIFICATIONS

Maximum Operating Pressure

250 PSI (17 Bar)

Operating Temperature Range

(O-Ring)

Buna N: -40° to +212°F (-40° to +100°C)

Materials

Body – Steel (Black Oxide)

Sleeve – Brass

Retaining Ring – Steel


O-Ring – Buna N

Pneu-Trol[®] SLIDE VALVES

- Two Position, Three-Way Manually Operated Valve
- For Pneumatic Operations Only Up to 250 PSI (17 bar) Non-Shock Service

The Pneu-Trol Slide Valve is a manually operated, two-position, three-way valve for pneumatic applications. Permits instant gauge reading, with gauge vented to atmosphere with valve sleeve in other position. Also ideal for applications such as air clamps and single acting cylinders. Brass sleeve assures ease of control and positive action.

DIMENSIONS

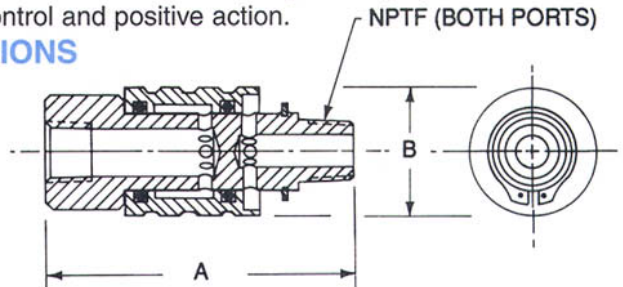

Size	A	B	Cv
1/8"	2-1/2" (63.5)	7/8" Dia. (22.3)	.98
1/4"	2-3/4" (69.9)	1-1/8" Dia. (28.6)	1.53
3/8"	2-13/16" (71.5)	1-1/8" Dia. (28.6)	1.78
1/2"	3-3/4" (95.3)	1-1/2" Dia. (38.1)	3.26

() Parentheses = Millimeters

ORDERING INFORMATION

Size	Part Number
1/8"	SL-10
1/4"	SL-20
3/8"	SL-25
1/2"	SL-30